

Wired Remote Controller WDC-86E/KD

Features

- ❖ Temperature setting with 0.5°C or 1°C steps
- ❖ Dual temperature set points
- ❖ 7-speed fan control
- ❖ 5-step swing louver setting
- ❖ Address setting
- ❖ Follow me
- ❖ Eco mode
- ❖ Room temperature display
- ❖ °F/°C display
- ❖ Daily timer
- ❖ Auto restart
- ❖ Bi-directional communication
- ❖ Main or secondary controller setting
- ❖ Display shut-off
- ❖ Night silent mode
- ❖ Remote signal receiver
- ❖ Clean filter reminder
- ❖ Error check function
- ❖ System parameter querying
- ❖ System setting control



Main or Secondary Controller Setting

Two controllers can be used together with single indoor units. Operating mode and settings would be set according to the most recent instruction received. The controller display screens are synchronized so that both displays update when a setting is adjusted.




Bi-directional Communication

The wired controller can query the system operating parameters thanks to the new bi-directional communication functionality. In addition, settings including static pressure, cold draft prevention and temperature compensation can be configured on the wired controller.



Temperature Setting

Set temperature can be adjusted in 0.5°C or 1°C steps, enabling precise comfort control.

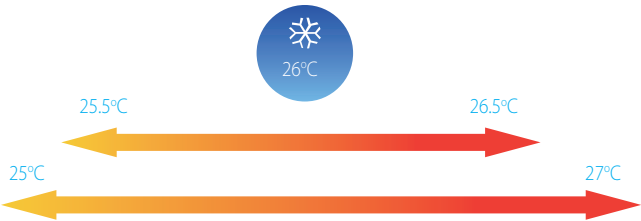

Follow Me

With the follow me function, the indoor unit responds to the temperature measured by the temperature sensor built-in to the wireless remote controller, rather than the temperature sensor in the indoor unit itself, enabling more precise control of the temperature in the user's immediate environment.



Commercial Air Conditioner Division
MDV part of the Midea Group of Companies

Distributed By:



iacs.com.au

Brisbane: 07 3890 8977 Perth: 08 9242 8400



Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.